




OTS 430

Tested according to EN 1154

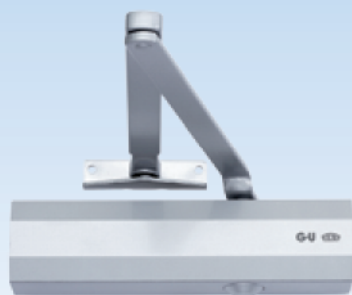


Product features

- Steplessly and laterally adjustable closing force sizes EN 2 – 5
- Valve functions which can be steplessly adjusted from the front:
 - closing speed
 - latching speed
- Thermomatic valve ensures that the closing function continues to work in the event of temperature fluctuations
- Safety valve in the closer protects against overload
- Max. door opening and closing angle 180° [1]
- Controlled closing from every opening angle
- Compact, state-of-the-art aluminium housing
- Optional: adjustable hold-open arm for door openings of 70 – 150° [3]
- Optional: OTS 430 BC (with back-check) tested according to EN 1154

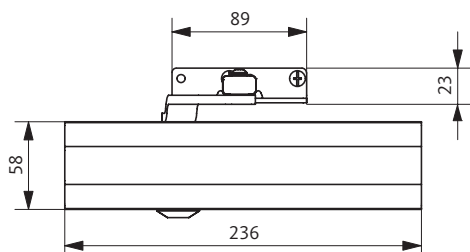

without mounting plate

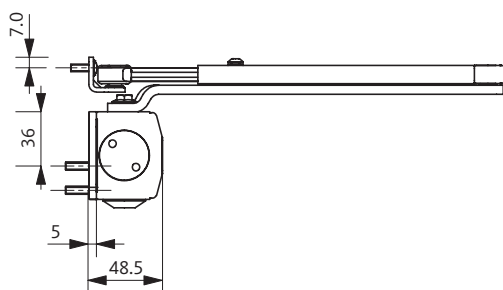

with mounting plate



04 0432-BPR-0067

EN 1154: 1996 + A1: 2002

4	8	5	1	1	4
---	---	---	---	---	---